

HAN ICH P

HIIIIIIIIIII

4III

-

- at

STANDARD PRODUCTS • BESPOKE DESIGN • UNIQUE SOLUTIONS

PROTEUS® RAM LUFFING CRANES

PROTEUS[®] Ram Luffing Pedestal cranes are suitable for installation on a wide range of offshore platforms and facilities and have a proven track record with many clients worldwide.

Each crane features a fully sealed box boom, single or dual hydraulic cylinders, quality components, electric or diesel prime movers, unique 'Protea' design features, hazardous or non-hazardous electrical packages and first class ergonomically designed operator cabins that enable safe and efficient crane operations.


Offering continuous 360 degree slewing, high performance lifting capabilities, a robust design and third party certification from ABS, DNV or Lloyds these versatile machines are ideally suited for cargo transfer, personnel handling or routine onboard lifting operations.


Designed in accordance with international standards/ specifications that include API 2C, DNV, EN13852-1 or NORSOK each machine can be configured easily to meet the specific requirements of any client or project -PROTEUS[®] cranes offer high quality, long term reliability and excellent performance.








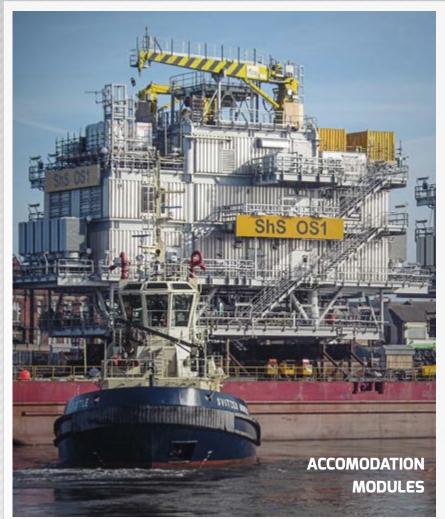

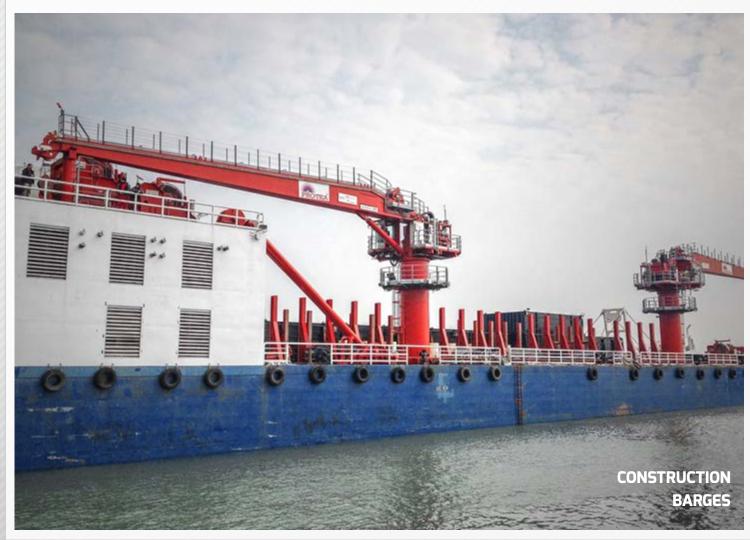

TYPCIAL CRANE ARRANGEMENT

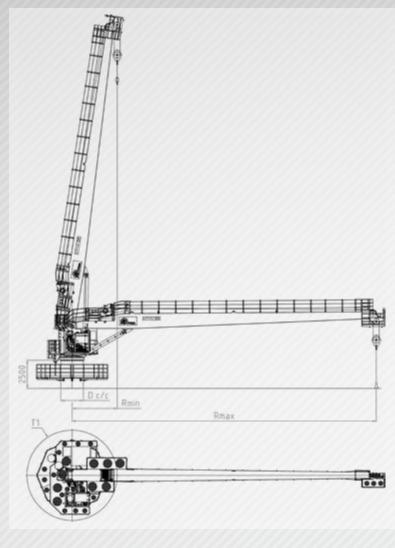

TYPCIAL OPTIONS

THE FOLLOWING OPTIONS ARE **AVAILABLE:**

- Designed in accordance with EN 13852, DNV, API or ABS
- Electro-hydraulic drive
- Diesel-hydraulic drive
- Complete explosion protection according to ATEX guidelines
- Man-riding winch
- AOPS Automatic Overload Protection System
- MOPS Manual Overload Protection System
- Rope Tensioning Systems Constant Tension
- AHC Active Heave Compensator
- Complete pedestal

Туре	D	Lifting Capacity	Hoisting Speed	Luffing Time	Slewing Speed	T1	Size	R_{max}	R_{min}
.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	mm	mT	m/min	sec	rpm	mm	5120	mm	mm
Proteus RAM 1630	1600	30	22.0	60	1.3	2 550	1 2 3	15 000 17 000 19 000	3 400 3 500 3 600
Proteus RAM 2040	2 000	40	22.5	70	1.1	2 900	1 2 3	25 000 27 000 29 000	4 700 4 800 4 900
Proteus RAM 2560	2 500	60	20.0	80	0.9	3 600	1 2 3	31 000 33 000 35 000	5 900 6 000 6 100
Proteus RAM 3080	3 000	80	18.8	90	0.7	4 350	1 2 3	37 000 39 000 41 000	7 100 7 200 7 300
Proteus RAM 35100	3 500	100	18.0	100	0.5	5 500	1 2 3	44 300 48 300 52 300	6 800 7 100 7 400





PROTEA SP. Z O.O. ul. Galaktyczna 30A 80-299 Gdansk, Poland www.protea.pl

Tel: +48 58 348 00 04 protea@protea.pl



TYPICAL RANGE DATA